

# WELDAS®

*The Professional's Choice*



## 2020


*Europe Catalog No. 0120*

COMFOflex®

## WELDING GLOVES




Cotton lining



Foam lining



COMFOflex® lining

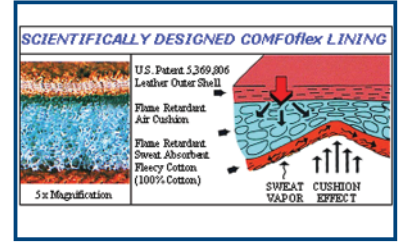


COMFOflex®

### 10-2000



S, L, XL, XXL  
LH  
L/18"



35 cm.

46 cm. (L/18")

- A-grade cow split leather
- Hand COMFOflex® lined
- Cuff cotton lined
- Wide body model
- Size L also available in Left Hand only pairs (LH) and 18" (46 cm.)



95%

KEVLAR® 4 ply + 5 ply

COMFOflex®

EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



413X3X



4133




Ω ELECTROSTATIC TESTED Ω

### 10-2178



L



35 cm.

- Same features like the 10-2000 glove
- One finger model



95%

KEVLAR® 4 ply

COMFOflex®

EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0002  
TÜV 21128415 002



413X3X



4133




Ω ELECTROSTATIC TESTED Ω

### 10-2087



L, XL



35 cm.

- A-grade cow shoulder split leather
- Hand full COMFOflex® lined
- Cuff cotton lined
- Wide body model



95%

KEVLAR® 4 ply + 5 ply

COMFOflex®

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0002  
TÜV 21128415 002



413X3X



4133




Ω ELECTROSTATIC TESTED Ω

## COMFOflex® WELDING GLOVES

10-2900



L, XL



36 cm.


- A-grade cow split leather
- Hand COMFOflex® and wool lined
- Cuff flame retardant lined
- Wide body model



70%

**250°C CONTACT**

KEVLAR® 4 ply + 5 ply



**STEERSOtuff®**


EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



10-2655



M, L, XL, XXL



37 cm.

- Hand bison leather
- Cuff split cowhide
- Inner back of the hand COMFOflex® lined
- Cuff flame retardant lined
- **CHROMIUM < 2 mg./kg.**



30%

**250°C CONTACT**

KEVLAR® 4 ply + 5 ply



**ThunderingBison™**


EN 12477 (09.2005) TYPE A/B  
TÜV BP 21146065 001  
TÜV 556-10-0071/01



10-2850



L, XL



36 cm.

- Grain and split deerskin
- Backhand COMFOflex® lined and inner cuff flame retardant lined
- Highest comfort level



30%

KEVLAR® 4 ply + 5 ply



**DEERSOsoft®**

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0001  
TÜV 21128415 002




## COMFOflex® WELDING GLOVES

10-2750



L, XL, XXL



36 cm.

- A-grade cow grain leather
- Backhand **COMFOflex**® lined and cuff cotton lined
- Back palm reversed grain (suede)
- Oil and water resistant
- Excellent quality and comfortable to wear



30%

**250°C CONTACT**

KEVLAR® 4 ply + 5 ply



**STEERSOstuff**®

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0002  
TÜV 21128415 002




Ω ELECTROSTATIC TESTED Ω

10-2755



L, XL



36 cm.


- Combined features:
- on the back of our 10-2385
- and the innerhand of the 10-2750 with extra comfort padges
- Oil and water resistant
- Excellent quality and comfortable to wear



30%

**350°C CONTACT**

KEVLAR® 4 ply + 5 ply




EN 12477 (09.2005) TYPE A/B  
TÜV BP 60022511 0001  
TÜV 21136762 003

10-2385



L, XL, XXL




35 cm.

- A-grade cow side split leather
- Hand full **COMFOflex**® lined and cuff full flame retardant lined
- Wide body model
- Aluminized back is designed to reflect radiant heat and has a layer of split deerskin in between the back and **COMFOflex**® lining



35%

KEVLAR® 4 ply



EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



+



=



44-3006LB, 44-3008LB, 44-3009BF:  
see page 39


## COTTON LINED WELDING GLOVES

### 10-2392



S, L, XL, XXL  
LH/L, LH/XL

L/18"



34 cm.

46 cm. (L/18)


- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better
- Size L also available in 18" (46 cm.)
- Size L and XL also available in Left Hand only pairs (LH)



95%

KEVLAR® 3 ply


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0002  
TÜV 21128415 002



### 10-2392 MIT



L



34 cm.

- One finger model of glove 10-2392
- Cow shoulder split leather
- Full cotton lined



95%

KEVLAR® 3 ply


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0002  
TÜV 21128415 002



### 10-2392GB



L, XL



34 cm.

- Same as glove 10-2392, but *Golden Brown™* model
- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better



95%

KEVLAR® 3 ply

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0002  
TÜV 21128415 002



### 10-2150



L, XL



36 cm.

- Innerhand is made of cow grain leather to make it oil and water resistant
- All other parts of the glove are made of cow split leather
- Full cotton lined



95%

**250°C CONTACT**

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60022511 0001  
TÜV 21136762 003




## COTTON LINED WELDING GLOVES

### 10-2101



S, L, XL, XXL  
LH/L, LH/XL



34 cm.

- The 10-2101 is our general purpose glove of the range
- Cow shoulder split leather
- Full cotton lined
- Size L and XL also available in Left Hand only pairs (LH)



90%


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002



### 10-2101GB



L, XL



34 cm.

- Same as glove 10-2101, but *Golden Brown™* model
- Cow shoulder split leather
- Full cotton lined



90%

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002





Weldas sizing incorporates EN 420 size standards, the lining and the intended use

### (EN 420)

#### GLOVE AND HAND SIZE REFERENCE

Hand Size Index	7½	8½	9	9½	10½
Weldas Size Label	S	M	L	XL	XXL
Measurement mm	190	216	229	241	267
Minimum length in mm	310	320	330	340	350




# WWW.WELDAS-CE.COM

## SOFTouch™ TIG WELDING GLOVES

### 10-1003



M, L, XL, XXL




35 cm.

- Oil and abrasion resistant
- Reversed (suede) grain pig leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002



### 10-1004



S, M, L, XL, XXL  
RH/XL




35 cm.

- Hand made of goatskin
- Double leather in the palm
- Very soft and excellent feeling
- Cuff made of grey flame retardant fabric
- Size XL also available in Right Hand only pairs (RH)

KEVLAR® 3 ply

SOFTouch™


EN 12477 (2001 + A1 : 2005)  
TYPE B  
TÜV BP 60118529 0001  
TÜV 21264046 002

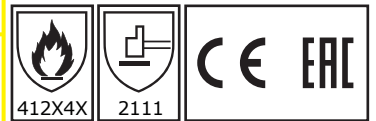

### 10-1005



S, M, L, XL, XXL



35 cm.

- Very smooth and pliable
- Calfskin grain leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002




Ω ELECTROSTATIC TESTED Ω

### 10-1007



M, L, XL



35 cm.

- Goatskin palm
- Cow split leather back and cuff

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE B  
TÜV BP 60017622 0003  
TÜV 21128415 002




## SOFTouch™

## TIG WELDING GLOVES

10-1009



M, L, XL, XXL



35 cm.

- Hand made of goatskin
- Very soft and excellent feeling
- Cuff made of split cow leather
- Seamless index finger

KEVLAR® 3 ply

SOFTouch™

EN 12477 (09.2005) TYPE B  
TÜV BP 60017622 0004  
TÜV 21128415 002




Ω ELECTROSTATIC TESTED Ω

10-1050



M, L, XL, XXL



32 cm.

- Outer hand made of soft black grain cow leather
- White grain goat leather spacers on the sides of the fingers
- Curved cuff made of supple split cow leather trimmed at the edge with white grain goat leather
- Thin fleecy, flame retardant lining at the back of the hand
- Seamless index finger

KEVLAR® 4 ply

SOFTouch™


EN 12477 (2001 + A1 : 2005)  
TYPE B  
TÜV BP 60123577 0001  
TÜV 21276706 001



10-2304



M, L, XL, XXL



32 cm.

- Hand made of deerskin
- Very soft feeling
- Cuff made of split cow leather

KEVLAR® 3 ply



DEERSOsoft®


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0004  
TÜV 21128415 002



10-2644



M, L, XL, XXL



32 cm.

- Hand bison leather
- Cuff split cowhide
- **CHROMIUM < 2 mg./kg.**



KEVLAR® 3 ply



ThunderingBison™

EN 12477 (09.2005) TYPE A/B  
TÜV BP 21146065 001  
TÜV 556-10-0071/01






## WORKING GLOVES

### 10-2660



L, XL



23 cm.

- Work glove designed for general purpose applications
- Grain pig leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove


Not to be used in an industrial environment



### 10-2670



M, L, XL, XXL



23 cm.

- Work glove designed for general purpose applications
- Grain goat leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove


Not to be used in an industrial environment



### 10-2680



L, XL



23 cm.

- Work glove designed for general purpose applications
- Grain cow leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

Not to be used in an industrial environment



### 10-1206



L



29 cm.

- Cow split leather
- Cotton lined
- Rubberized safety cuff

EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO




## WORKING GLOVES

10-2806



L



25 cm.

- Cow split leather
- Double leather in the palm
- Cotton lined
- Rubberized safety cuff


EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO



10-2209



S, M, L, XL, XXL



26 cm.

- A-grade cow split leather
- Cotton lined
- Rubberized safety cuff


EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO



10-2209LB



L, XL



26 cm.

- A-grade cow split leather
- Cotton lined
- Rubberized safety cuff
- *Lava Brown™* model

EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO



10-2207



L, XL



25 cm.

- Cow split leather
- Cotton lined
- Safety cuff

EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO




## DRIVER GLOVES

10-2064



L, XL



24 cm.

- Durable split cow leather


EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO



10-2336



M, L, XL



24 cm.

- Palm made of cow grain side leather  
- Back made of split cow leather  
- Extra fingertip sensitivity

KEVLAR® 3 ply




EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO



10-2633



M, L, XL, XXL



25 cm.

- Innerhand made of grain bison leather  
- Back made of split cow leather  
- **CHROMIUM < 2 mg./kg.**

KEVLAR® 3 ply



ThunderingBison™


EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO



10-2700



S, M, L, XL, XXL



26 cm.

- Cow grain side leather of the highest quality  
- Oil and water resistant



EN 388 (2016)  
UL 0843-PPE-0115  
UL NC29550-D1-EDO





**Weldas® Europe B.V.**  
**Blankenweg 18**  
**NL-4612 RC Bergen op Zoom**  
**Holland**

**Tel.: +31 164 27 46 50**  
**Fax: +31 164 27 46 55**  
**europa@weldas.eu**  
**www.weldas.com**

**You**  **Tube** >



[WWW.WELDAS-CE.COM](http://WWW.WELDAS-CE.COM)

KEVLAR® is a registered trademark of E.I. DuPont Co.  
Weldas® is a registered trademark of Weldas® Company.  
Arc Knight® is a registered trademark of Weldas® Co.  
COMFOflex® is a registered trademark of Weldas® Co.  
DEERSOsoft® is a registered trademark of Weldas® Co.  
LAVAsield® is a registered trademark of Weldas® Co.  
STEERSOuff® is a registered trademark of Weldas® Co.  
SWEATSOpad® is a registered trademark of Weldas® Co.  
TURMOflex® is a registered trademark of Weldas® Co.  
Yellowjacket® is a registered trademark of Weldas® Co.  
Arc Queen™ is a trademark of Weldas® Co.  
COMBOframe™ is a trademark of Weldas® Co.  
Fire Fox™ is a trademark of Weldas® Co.  
Glove Medic™ is a trademark of Weldas® Co.  
Golden Brown™ is a trademark of Weldas® Co.  
Lava Brown™ is a trademark of Weldas® Co.  
PYTHONrap™ is a trademark of Weldas® Co.  
SOFTouch™ is a trademark of Weldas® Co.  
ThunderingBison™ is a trademark of Weldas® Co.

©0120 Weldas® Europe B.V.  
Printing and typesetting errors reserved.

**YOUR DISTRIBUTOR:**

